

## “CLASSIC” DRILLING DEVICE and SHAFTS


### Characteristics

- ▶ Drilling devices to drill pipes in service.
- ▶ Include drain tap and hose to remove the shavings.
- ▶ 55-mm stroke, extendable using the different shaft positions.
- ▶ 5 Shafts type A with octagon to connect OPTIMQ cutters.
- ▶ 2 Shafts type B for use with Starrett hole cutters.
- ▶ Compact size and maximum resilience.
- ▶ Especially designed for use on site.
- ▶ Very easy maintenance.
- ▶ Fitted with tightening O-ring seals and self-lubricating bearings.
- ▶ High quality surface finish.

### MATERIALS

- ▶ Tempered nickel-plated steel body.
- ▶ Tempered ground stainless steel shafts.
- ▶ Front needle bearing.
- ▶ Self-lubricating axial bearings.
- ▶ 1/2" nickel-plated brass drain tap.
- ▶ Nickel-plated steel drain fitting.
- ▶ Transparent drain hose supplied with the drill.


### Advantages

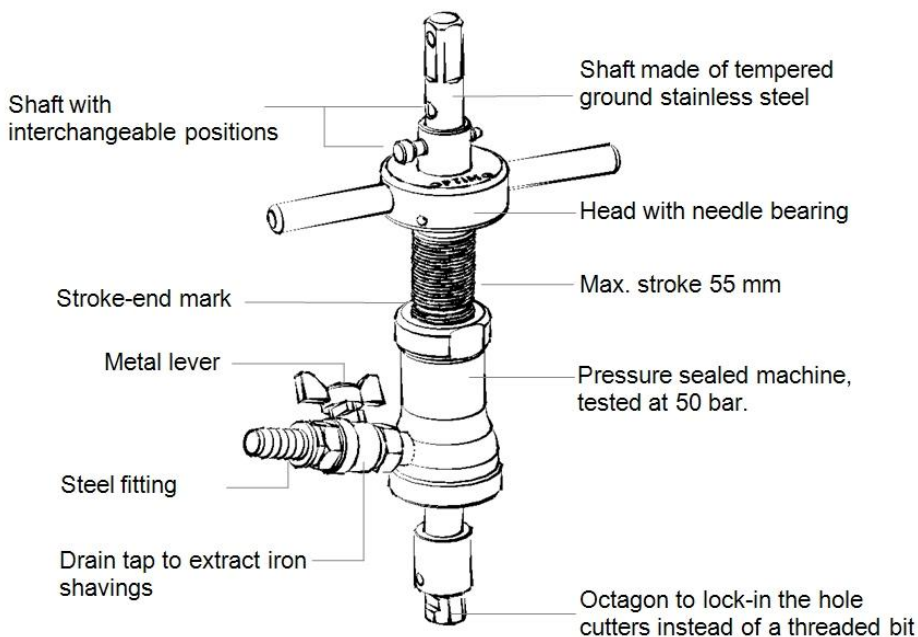


- Highest resistance of all pieces (tempered and nickel-plated steel)
- Highest efficiency with minimum weight and dimensions




## “CLASSIC” DRILLING DEVICE and SHAFTS




“Classic” device  
with A-1 shaft




“Classic” device  
with A-2 shaft



“Classic” device  
with A-5 shaft



“Classic” device  
with A-7 shaft

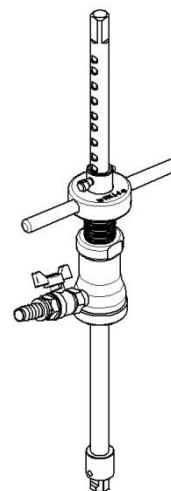

“Classic” device  
with A-8 shaft

## Codes, names and dimensions

CLASSIC DRILLING DEVICE							Weigh kg
Code	Name	Shaft dimensions (mm)					
		Square	Lenght	Diameter	Steps	Connection	
OQ80211	Classic device with A-1 shaft	17	295	20	3	Octog 15	2,310
OQ80212	Classic device with A-2 shaft	17	340	20	3	Octog 20	2,700
OQ80215	Classic device with A-5 shaft	17	345	20	6	Octog 15	2,600
OQ80217	Classic device with A-7 shaft	17	400	20	6	Octog 20	2,830
OQ80218	Classic device with A-8 shaft	17	630	20	10	Octog 20	3,360

RANGE OF USE OF THE CLASSIC SHAFTS		
Code	Name	Range of use
OQ90142	Shaft A-1 (oct:15-length:295-steps:3)	• Dry and hot threaded tapping saddles from 1" to 2"
OQ90143	Shaft A-2 (oct:20-length:340- steps:3)	• Slimline and hot flanged saddles, DN65, 80 and 100
OQ90563	Shaft A-5 (oct:15- length:345- steps:6)	• PE Outlet hot tapping saddles, PE32 and 50 • Dry and hot threaded tapping saddles from 1" to 2"
OQ90878	Shaft A-7 (oct:20-length:400- steps:6)	• PE Outlet hot tapping saddles, PE90 and 110 • Slimline and hot flanged saddles, DN65, 80 and 100
OQ90879	Shaft A-8 (oct:20-length:630 -steps:10)	• Slimline saddles + F4 or F5, DN80 & DN100 gate valve • ELGEF saddle + PE-PE 90 & 110 Connector • Hawle saddles (ref. 5230 & 3510) DN80 & 100 + F4 valve • Hawle saddles (ref. 5230 & 3510) DN80 & 100 + Connector
OQ90569	Shaft B-5 (½"UNF-length:320-steps:5)	• For Starrett Cutters 22 & 29mm fitted directly to the Shaft • For Starrett Cutters 38 & 44mm using the ½"x5/8" Coupler
OQ90568	Shaft B-7 (hex.11/32"-length:360-steps:6)	• For Starrett Cutters 54, 70 & 86mm using the Starrett Arbor A-10