





Special advantages:

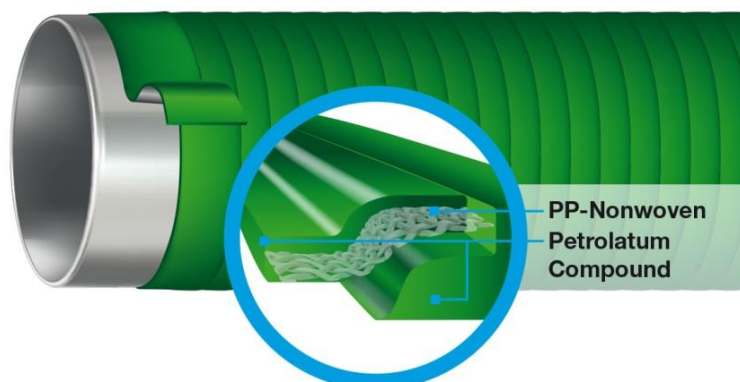

For temperatures of
-50 °C (-58 °F) to +50 °C (+122 °F).



Flexible and adaptable.



Resistant to acids, alkalis and salts.



Impermeable for water and gas.

Plastic petrolatum tape for sealing and corrosion prevention at metallic components, cable connections, pipelines and armatures.

For a century now, DENSO Group Germany has been representing experience, quality and reliability for corrosion prevention and sealing technology. The success of the internationally leading corporation is based on the development of the "DENSO-Tape", which was already patented in 1927 as the first product worldwide for the passive corrosion prevention of pipelines. Since then, the DENSO Group Germany has been establishing and guaranteeing the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees continuously implement safe and individual solutions in a personal cooperation with the customer.

Description

DENSO®-Verte is a cold applied corrosion prevention tape based on petrolatum. Test methods of EN 12068 were applied.

DENSO®-Verte consists of an impregnated polypropylene carrier nonwoven, which is coated on both sides with a corrosion prevention petrolatum mastic. The petrolatum mastic is stabilized by polymer and mineral additives, which means that it can be used at design temperatures of -50 °C (+58 °F) and up to +50 °C (+122 °F).

DENSO®-Verte is moisture impermeable and highly resistant against acids, lyes and salts.

DENSO®-Verte is based on more than 100 years of experience of DENSO Group Germany in the production of

high-quality corrosion prevention products on petrolatum basis.

DENSO®-Verte is used in many applications, e.g. as

- Corrosion prevention for structural metallic components in buildings and above ground systems;
- Corrosion prevention of metal parts or pipe systems inserted into concrete or screed;
- Galvanic separation layer for metallic constructions;

Gaz Réseau Distribution France (GRDF) has approved DENSO®-Verte for temporary sealing of low-pressure pipelines under the number 2020/004/LH.

DENSO®-Verte will be wrapped as insulation layer at least with one layer and, as corrosion prevention encasement, at least with two layers, which means wrapped with at least 50% overlapping or layer-by-layer with appropriate overlapping.

A rockshield **DEPROTEC®-DRM PP** or the polyurethane glass fiber fabric **DEPROTEC®-PUR** can be applied across the encasement to achieve an increased mechanical protection.

DENSO®-Tape MT (+60 °C, +140 °F), **DENSO®-Feu** (+70 °C, +158 °F) and **DENSO®-Cal** (+110 °C, +230 °F) are additional corrosion prevention tapes with the proven DENSO quality for applications with higher temperature requirements.

Typical product properties

Property	Unit	Typical value	Required value	Test method
Thickness	mm	app. 1.1	-	-
Color	-	Brown-green	-	-
Carrier	-	Polypropylene nonwoven	-	-
Dielectric strength	kV / mm	≥ 9		
Specific electrical insulation resistance	Ω m ²	≥ 10 ⁷	≥ 10 ⁶	EN 12068
Tape strength (nonwoven)	N / cm	≥ 40		ASTM D1000
Elongation at break	%	≥ 7		DIN 30672
Dripping point	°C (°F)	app. +60 (app. +140)	-	
Saponification number	mg KOH / g	≤ 10	< 25	EN 12068
Operating temperature	°C (°F)	-40 to +30 (-40 to +86)	-	-

Ordering information and packaging

Roll length 10 m

Width[mm]	Number of rolls per box	Tape length per box (m)	Tape surface per box (m ²)	Weight per box app. (kg)
50	24	240	12	18,0
100	12	120	12	18,0
150	12	120	18	25,0
200	6	60	12	17,0

Additional dimensions available on request.

Storage

When stored in its original, unopened packaging, **DENSO®-Verte** can be stored for at least 60 months after the manufacturing date.
Storage temperature: ≤ +30 °C (+86 °F)
The product must be stored dry, without load on the front surface.