


LaserGuide 2 installation instructions for DENSOMAT® -KGR Junior





Step 1: Mounting the LaserGuide 2 on the DENSOMAT® -KGR Junior

- Disassemble the DENSOMAT® -KGR Junior as shown in Fig. 1 on the right. Then attach the pre-assembled LaserGuide 2 to the axle of the DENSOMAT® -KGR Junior.
- Use the knurled screw on the LaserGuide 2 to ensure that it is firmly and securely mounted on the axle.
- Finally, reassemble the DENSOMAT® -KGR Junior by assembling the previously disassembled parts in reverse order. Make sure that all parts are correctly positioned and fastened.

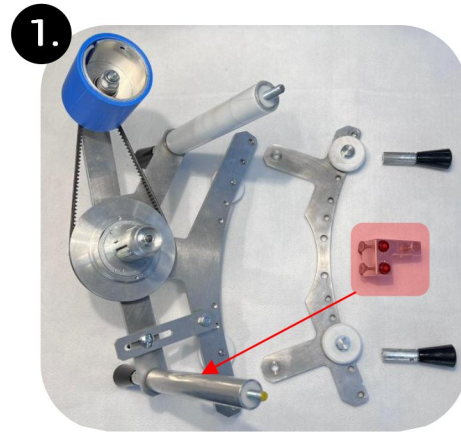

Step 2: Aligning the LaserGuide 2

- Adjust the marking lasers so that they are parallel to each other in the circumferential direction (see Fig. 2 and 3).
- Position the tape along the marking lasers to achieve an overlap of at least 67% (see Fig. 3)
- After aligning the tape, start with the specified processing.

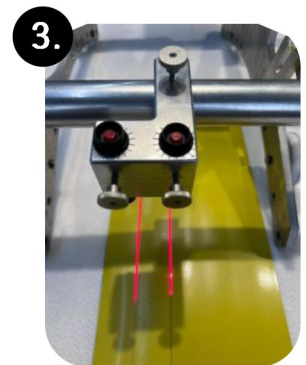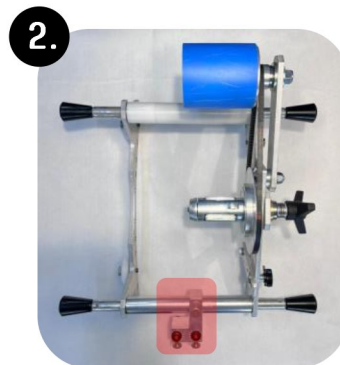

DENSO® GmbH

Felderstraße 24 | 51371 Leverkusen | Germany
Phone: +49 214 2602-0 | info@denso-group.com
www.denso-group.com

Our product information, recommendations for use and other publication provide advice that is, to the best of our knowledge, factually correct, and reflects the latest information available to us on the date of printing.

However, the content is not legally binding.

For this reason, no liability is accepted for inaccurate advice or any failure to provide advice. The user is required to check the suitability and possible applications for the intended purpose.

Unless otherwise specified, all of the brands mentioned are, at least in Germany, trademarks of DENSO and are protected by law. Our general terms and conditions of sale, which can be found at www.denso-group.com apply exclusively to all transactions. The place of jurisdiction is Leverkusen, Germany.

06.2025